
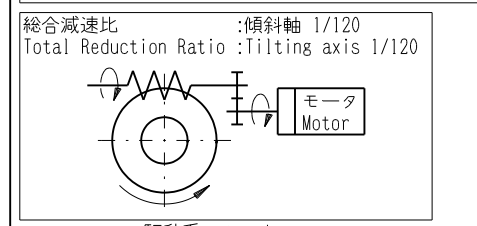


Rotating axis 回転軸	FANUC αiF4	Tilting axis 傾斜軸	FANUC αiF4
AC servo motor ACサーボモータ	FANUC αiF4	FANUC αiF4	FANUC αiF4
Total reduction ratio 総合減速比	1/72	1/120	1/120
Max. number of revolutions テーブル最高回転数	41.6min ⁻¹ (τ-23000min ⁻¹)	25.0min ⁻¹ (τ-23000min ⁻¹)	25.0min ⁻¹ (τ-23000min ⁻¹)

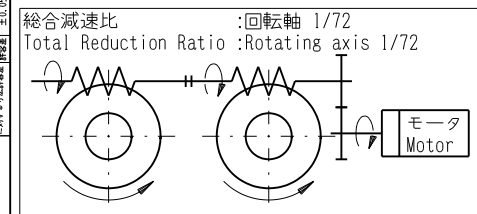

駆動系スケルトン
Skelton Drawing of Drive System

Tilting axis feedback cable
傾斜軸フィードバックケーブル

Air supply port for clamping
Air tube φ6
クランプ用エア供給口
φ6エアチューブ

For table clamping, connect air at a pressure of 0.3 to 0.5 MPa through a filter 40 μm or less.
クランプ用エアは、40μm以下のフィルタを通した0.3~0.5MPaのエアを接続してください。

