


チャックフランジ 適合表

円テーブル割出台 適合機種	スクロールチャック 型式					チャックフランジ										
	帝国チャック(株)		(株)北川鉄工所		小林鉄工(株) Victor	型式	ネジ(無記入は各々3ヶ)		寸法(mm)右図		質量 (kg)					
番号	型式	一体爪	分割爪	一体爪	分割爪		一体爪	分割爪	六角穴付ボルト	六角ボルト		φA	B	φC	φD	
01	DMB75	MS-3		SC-3		SC85F		CF3-01	M6×16、M6×14		112	14	30	60	1.0	
		MS-4		SC-4		SC110F		CF4-01	M8×16	M6×14	112	14	30	80	1.0	
		MS-4		SC-4		SC110F		CF4-01U	M6×14	M6×16	112	14	80	30	1.0	
02	DMB90 JNC(H)140	MS-4		SC-4		SC110F		CF4-02	M8×16	M6×16	132	17	40	80	1.6	
		MS-4		SC-4		SC110F		CF4-02S	M8×16	M6×16	132	17	40	80	1.6	
								TC110F	CF4TC-02	M8×60、M6×16		132	17	40	80	1.7
		MS-5		SC-5		SC130F		CF5-02	M8×16	M6×16	132	17	40	100	1.6	
		MS-5		SC-5		SC130F		CF5-02S	M8×16	M6×16	132	17	40	100	1.6	
03	DMB90							TC130F	CF5TC-02	M8×65、M6×16		132	17	40	100	1.8
		MS-4		SC-4		SC110F		CF4-02U	M6×16	M6×16	112	17	80	40	1.2	
		MS-5		SC-5		SC130F		CF5-02U	M6×16	M8×16	132	17	100	40	1.6	
03	DMB110	MS-4		SC-4		SC110F		CF4-03	M8×16	M8×16	112	15	40	80	1.0	
		MS-5		SC-5		SC130F		CF5-03	M8×16 6ヶ		168	17	40	100	2.6	
								TC130F	CF5TC-03	M8×65、M8×20		168	18	40	100	3.2
		MS-6	MS-E-6	JN06	JN06T	SC165F		CF6-03	M8×16	M10×20	168	18	40	130	2.8	
		MS-6	MS-E-6	JN06	JN06T	SC165F		CF6-03S	M8×16	M10×20	168	18	40	130	2.8	
		MS-6	MS-E-6	JN06	JN06T	SC165F		CF6-03U	M8×16	M10×20	168	18	130	40	2.8	
04	DMB135 JNC(H)200 YNC(P)200 CTB210							TC165F	CF6TC-03	M10×70、M8×20		168	18	40	130	3.3
		MS-5		SC-5		SC130F		CF5-04	M8×20、M10×20		192	20	70	100	4.1	
		MS-6	MS-E-6	JN06	JN06T	SC165F		CF6-04	M10×20	M10×20	192	20	70	135	4.1	
								TC165F	CF6TC-04	M10×70、M10×20		192	20	70	130	4.2
		MS-7	MS-E-7	JN07	JN07T	SC190F		CF7-04	M10×20	M10×20	192	20	70	155	4.1	
		MS-7	MS-E-7	JN07	JN07T	SC190F		CF7-04U	M8×20	M10×20	192	20	155	70	4.1	
05	DMB160							TC190F	CF7TC-04	M10×80、M10×20		192	20	70	155	4.4
		MS-9	MS-E-9	JN09	JN09T	SC230F		CF9-04	M10×30	M12×25	234	24	190	70	7.1	
		MS-7	MS-E-7	JN07	JN07T	SC190F		CF7-05	M10×20 6ヶ		234	20	60	155	6.0	
								TC190F	CF7TC-05	M10×80、M10×20		234	20	50	155	6.7
		MS-9	MS-E-9	JN09	JN09T	SC230F		CF9-05	M12×25	M10×20	234	20	60	190	6.0	
		MS-9	MS-E-9	JN09	JN09T	SC230F		CF9-05S	M12×25	M10×20	234	20	60	190	6.0	
06	JNC(H)170 YNC(P)170	MS-9	MS-E-9	JN09	JN09T	SC230F		CF9-05U	M10×25	M12×20	234	20	190	60	6.0	
								TC230F	CF9TC-05	M12×85、M10×20		234	20	60	190	6.9
		MS-5		SC-5		SC130F		CF5-06	M8×20	M8×16	168	18	60	100	2.8	
								TC130F	CF5TC-06	M8×65、M8×20		168	18	60	100	3.0
		MS-6	MS-E-6	JN06	JN06T	SC165F		CF6-06	M10×20	M8×16	168	18	60	130	2.8	
								TC165F	CF6TC-06	M10×70、M8×20		168	18	60	130	3.1
07	JNC(H)250 YNC(P)250	MS-7	MS-E-7	JN07	JN07T	SC190F		CF7-07	M10×20	M10×20	252	20	90	155	7.0	
								TC190F	CF7TC-07	M10×80、M10×20		234	20	90	155	6.2
		MS-9	MS-E-9	JN09	JN09T	SC230F		CF9-07	M12×25	M10×20	234	20	90	190	6.0	
08	DEF200							TC230F	CF9TC-07	M12×85、M10×20		234	20	90	190	6.4
		MS-5		SC-5		SC130F		CF5-08	M10×20、M8×16		200	20	40	100	4.4	
		MS-6	MS-E-6	JN06	JN06T	SC165F		CF6-08	M10×20	M10×20	200	20	40	130	4.4	
		MS-7	MS-E-7	JN07	JN07T	SC190F		CF7-08	M10×20	M10×20	200	20	40	155	4.4	
		MS-7	MS-E-7	JN07	JN07T	SC190F		CF7-08D	(直付型)		192	10	40	155	2.0	
MS-9	MS-E-9	JN09	JN09T	SC230F		CF9-08	M10×20	M12×25	234	20	190	40	6.0			

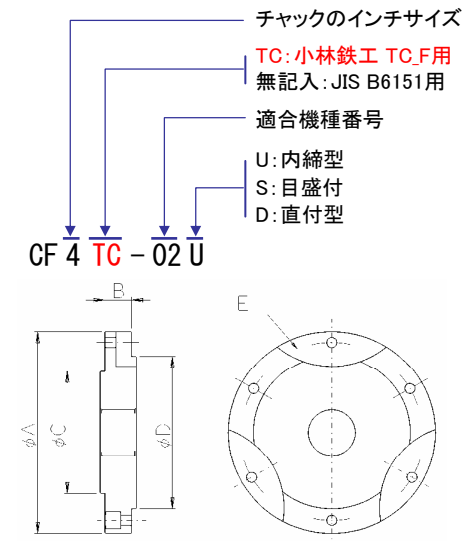

φCは、相手内径より0.2程度マイナスしています。
 表中の六角穴付ボルトだけのタイプに、切欠きEはありません。

チャック フランジ 型式	小林鉄工(株) Victor					
	チャック 型式	質量 (kg)	参考寸法(mm)下図			
			φA	B	φC	φD
CF3-	SC85F	1.6	87	46	15	16
CF4-	SC110F	3.7	110	58	18	24
CF5-	SC130F	5.0	132	60	20	32
CF6-	SC165F	9.0	167	66	25	44
CF7-	SC190F	14.8	192	75	30	54
CF9-	SC230F	22.0	233	82	35	70
CF4TC	TC110F	3.4	112	58	31	24
CF5TC	TC130F	5.1	132	60	37	32
CF6TC	TC165F	10.0	167	66	44	44
CF7TC	TC190F	14.0	192	75	46	54
CF9TC	TC230F	21.0	233	82	55	70

